



## SPECIAL ELASTOMERS TYTON® PUSH-ON TRANSITION GASKETS



The TYTON® Push-On Transition Gasket is designed to be used in Tyton® joint fittings for adapting to PVC or steel pipe (IPS dimensions). TYTON® Push-On Transition gaskets are dual hardness gaskets made from vulcanized synthetic rubber, and meet the requirements of the National Sanitation Foundation (NSF) Standard ANSI/NSF-61. For applications with temperatures above 150°F, or for other special service applications, consult the table below or call your Maloney Technical Products Customer Service Representative.

Tyton® Push-On Transition Gasket

### Available in the following compounds:

**COMPOUNDS:**

**MAX SERVICE TEMPERATURE:**

**COMMON USES:**

	MAX SERVICE TEMPERATURE:		COMMON USES:
	Water & Sewer	Air	
EPDM	212°F	150°F	Vegetable Oil, Alcohols, Dilute Acids, Diluted Alkalis, MEK, Acetone, fresh water, sea water, storm water, sanitary sewage & reclaimed water
Nitrile	150°F	125°F	Fresh water, salt water, sanitary sewage, storm water, petroleum products, oils, fats, chemicals, greases
Neoprene	200°F	150°F	Fresh water, salt water, sanitary sewage, storm water, greases
FKM	212°F	300°F	Fresh water, salt water, storm water, aromatic hydrocarbons, fuels, acids, vegetable oils, petroleum products, and most chemicals and solvents

● Available in Sizes 4" - 8"


● Standard SBR made per ANSI/AWWA C111/A-21.11.

### Maloney Technical Products

1300 East Berry Street • Fort Worth, TX 76119 • 817-923-3344 • Fax 817-923-1339  
email [contact@maloneytech.com](mailto:contact@maloneytech.com) • website [www.maloneytech.com](http://www.maloneytech.com)



**DIMENSIONS FOR TYTON® PUSH-ON TRANSITION GASKETS**

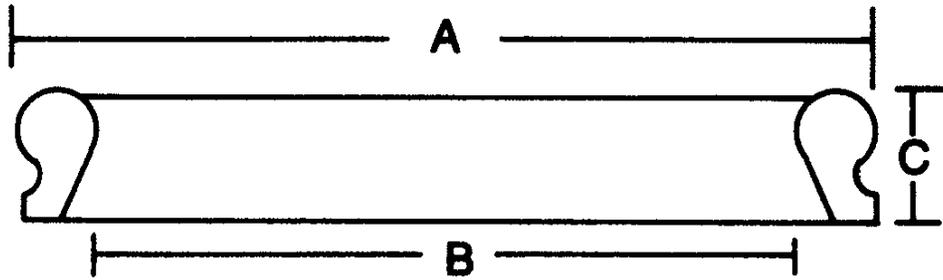

Size	A	B	C
4"	5.74	4.26	1.51
6"	7.86	6.38	1.62
8"	10.15	8.31	1.94

Call a Maloney Technical Product Customer Service Representative with the project specifications for recommendation on best compound to use for a special application, current lead times and for pricing. Maloney maintains inventory on many of the sizes and special compounds.

---

**Maloney Technical Products**

1300 East Berry Street • Fort Worth, TX 76119 • 817-923-3344 • Fax 817-923-1339  
email [contact@maloneytech.com](mailto:contact@maloneytech.com) • website [www.maloneytech.com](http://www.maloneytech.com)